


INFLATABLE LIFERAFTS

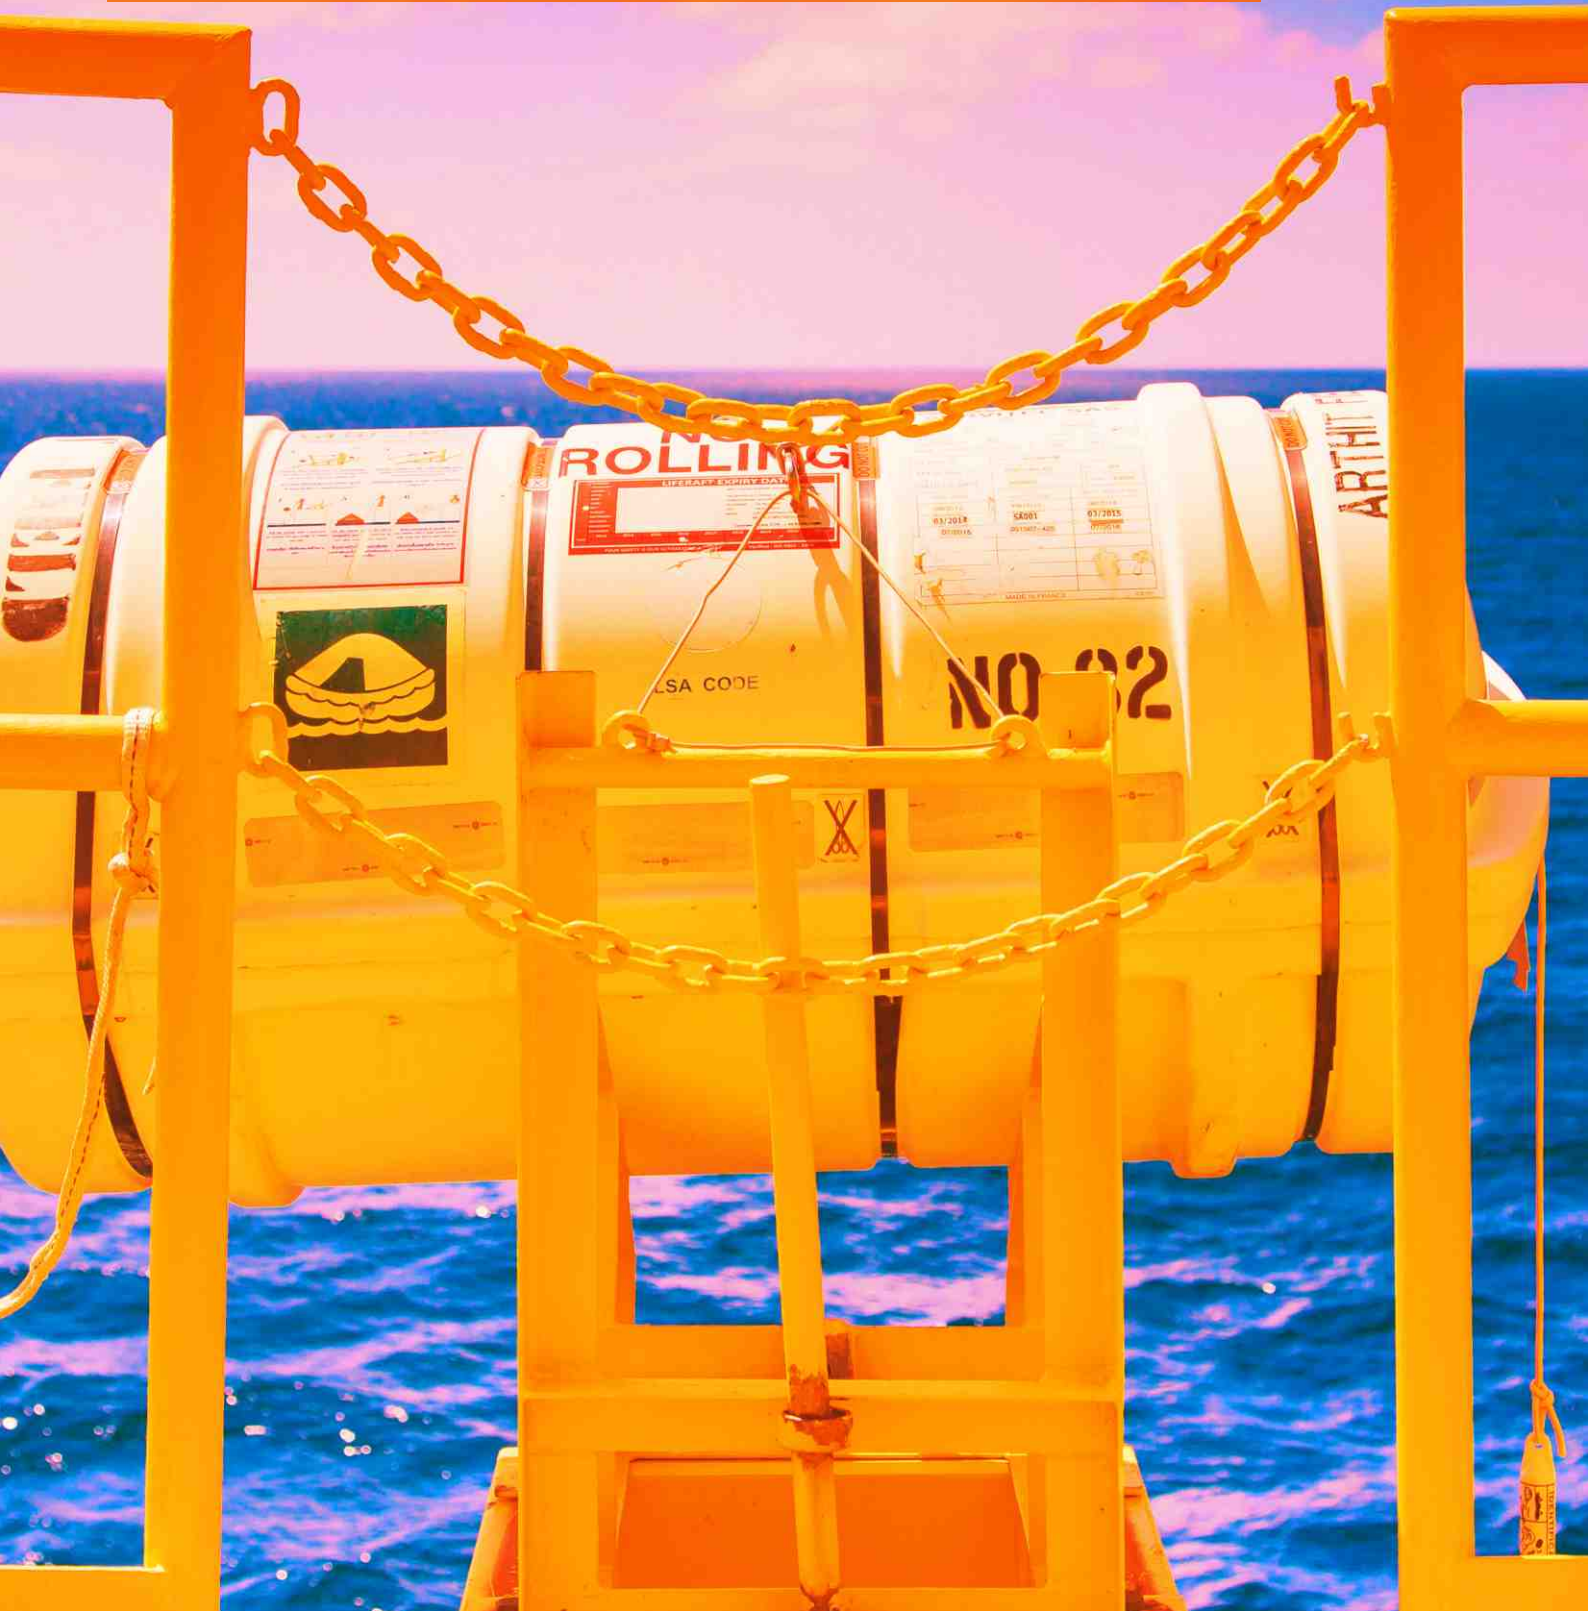

THROW OVER-BOARD LIFERAFT

SHM's range of Throw Over-Board Liferafts are manufactured to the highest quality standards, under close supervision of international classification societies. Standard SOLAS Liferafts are available in capacity of 6, 10, 15, 20 & 25 persons to suit vessel's safety plan and are designed to function in adverse sea conditions (-30C+60 C).

KEY FEATURES


- Comply to SOLAS LSA Code 96 including latest amendments in the year 2010 i.e. MSC Res.218(82), 226(82), 293(87) & 295(87)).
- Approved by Directorate General of Shipping India and Ministry of Surface Transport, which are both representative bodies of the Govt. of India.
- Manufactured from polyester neoprene coated fabric that complies to MSC Resolution 81/70 for excellent weather resistance and permeability.
- Two buoyancy chambers ensures that with failure of one, the other provides sufficient buoyancy to carry passengers safely.
- Drop tested for maximum stowage height of 35 meters.



ACCESSORIES



Hydrostatic Release Unit (HRU)
Code: S05101



Deck Cradles
Code: S04131



Column Racks
Code: S04130

MODEL NO.	PRODUCT CODE	CAPACITY	PHYSICAL FORM	CONSTRUCTION OF CANOPY ARCH	WIDTH (mm) (A)	HEIGHT (mm) (B)	WORKING PRESSURE (in mm, wg)	CONTAINER DIMENSIONS	
								LENGTH (mm) (C)	DIAMETER (mm) (D)
A-6 (II)	S02101	6	◆		2116	1220	1400	1245	520
A-10 (II)	S02102	10	◆		2720	1400	1400	1260	635
A-15 (II)	S02103	15	◆		3360	1680	1400	1420	635
A-20 (II)	S02104	20	●		3820	1900	1400	1495	737
A-25 (II)	S02105	25	●		4220	2100	1400	1495	737

